

New Features & Upgrades

Dual Temperature Cold/Hot Water Control

Can be set to bring the water temperature down to as low as 37F (2.7C) or as high as 104F (40C). Experience the flexibility of cold and hot water immersion, catering to a wide range of therapy needs.

Upgraded High-Efficiency Chiller

Cools water faster and functions better in a wide range of weather temperature conditions.

Intuitive Touch Screen Interface

Customize your experience with user-friendly controls.

Wifi Remote App Functionality

Manage your settings from anywhere with our innovative app.

Enhanced Double Particle-Filtration System

Featuring a re-usable external filter for quick, straightforward changes and a larger secondary internal filter. The dual-stage setup helps maintain the highest water quality and extends the interval between filter changes.

Maintenance-Free Composite Wood Breath Deck Options

Achieve the aesthetic of natural wood without the upkeep. These composites are designed to last for years.

Upgraded Ventilation

Side and back vents provide easy access and are engineered to endure harsh weather conditions.

Upgraded Programmable Lighting

Enhance your immersion with ambient lighting. Change the colors based off of your mood.

Includes Insulated Protective Cover with Child Safety Locks

Protects the Breath Deck and Ensures protection and safety for the entire family.

Retained Signature Features

Robust Commercial-Grade Construction

With superior insulation for optimal energy efficiency.

Ozone Purification System

Breaks down organic materials like bacteria and viruses without chemicals. Reduces toxic metals safely.

Versatile Breath Deck

Ideal for enhancing breathwork practices.

Discreet Mechanics Bay


Keeps electronics neatly concealed and protected.

Industry-Leading 5-Year Limited Warranty

5-Year Body Warranty + 1-Year Chiller Warranty



The Cold Stoic 3.0 is our latest flagship product for the ultimate cold plunging experience. With a bevy of advanced features and upgrades, the Cold Stoic 3.0 sets a new standard for performance, convenience, and durability in cold/hot water exposure.

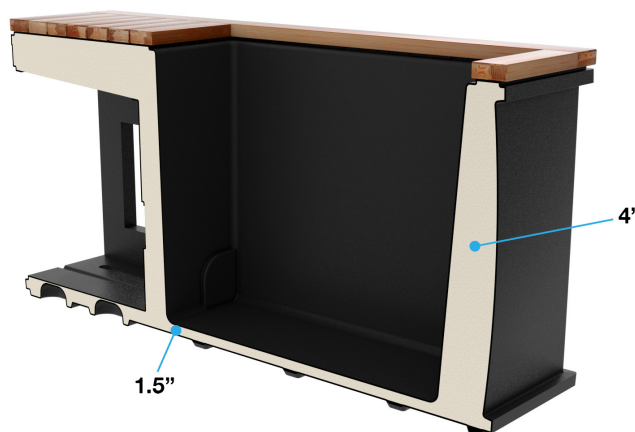

Dimensions

Body

70" L x 33" W* x 35" H

*at base and top. Approximately 35.5" at the widest point of the contoured sides

Tank

40" L x 25" W x 31" D

Weight

Product Weight (Dry): 360 lbs

Filled Weight (with 95 US Gallons): Approximately 1,155 lbs

Noise Rating

67 Decibels at a 2-inch distance from the large grill (with ventilation grills in place while Chiller is active)

58 Decibels at approximately 3 feet from the large grill (with ventilation grills in place while Chiller is active)

Chiller Specifications

Custom-Optimized 0.5 HP Chiller

Power

Requires Dedicated Circuit

GFCI Power Plug with 9 Foot Power Cord

Power Use Under Load

Average Draw	Volts	Amps	Watts
Hot to Cold	119	6.1	518
Cold to Hot	119	8.6	1013

Contact Information

Email: help@renutheraPy.com

Phone: 714-617-2007

