

# SHOW IMAGE INTO NEW LOOK

## Company Profile & Standing LED Display

### Profile

About Us

Brand

Specialities

### Standing LED Screen

LED Poster

Wall Mount

Lifting Screen

Creative

### Case Show



A3 Building, Fuwei 2nd Industrial Park  
Fuyong Town, Bao'an District  
Shenzhen, China

Tel: +86 755 33503179 Ph: +86 137 9850 8687 Fax: +86 755 33503179

A large orange triangle pointing to the right, located on the left side of the page.

## Standing LED PostAir

- [About US Pg 3 - 4](#)
- [Product Details Pg 5 - 6](#)
- [Product Showcase Pg 7](#)

## About YUCHIP


**YUCHIP** is dedicated, "Showing the Wonderful World" by exporting High-Quality LED display all over the world. We focus on High-End partnership with customers, supporting customer development, from good to better. Believe from low to high, our goal is to be in long-term platform, never believed on short-term.

The vision should be High-enough that cares Customers benefit till end. What we are doing is:


Deliver quality equipment, professional and timely service, work in "Act Locally" direction, setup branch/office each main land for domestic after services, set up distributor relationship support customers on site and fast.

Our linked-branches in Europe, South America, Middle East and North Africa, , and distributor-Ship in Southeast Asia, other's in depth-vision.

SHENSHEN YUCHIP LIGHTING  
CO., LTD

  
ERIC ZHENG

## Our Specialities



High-Definition LED Beads with a depth-touch to bottom  
Sleeked design to adjust on every steel frame with front support



Gold plated & Solder Post  
Profile Polarized, Fully Shrouded Body

## YUCHIP

**"Innovation"** Every steps lead to an innovative path

**"Partnership"** Goal is to be High-End supportive

**"Attentive"** Being able to be focused to every saying

## Connect to US

**YUCHIP** is the your trustworthy and reliable partner and your first priority for innovative connectivity solutions

**Yuchip** is committed to provide High-End connectivity solutions. Our Value concept is built upon the principle of "Connect to your fortune" this is our common goal we glad to share to our customers. Our guidance will guide you to develop the blended service creation, which enables us to win the every market by connecting every story to network business.




### Network


WIFI, 4G, GPS, USB, HDMI, Audio

### Industry


Indoor/Outdoor Shopping Center, Exhibitions, advertising platform, Stations, Airports, Wedding, Conference Halls, Photo studio, Instant Message.

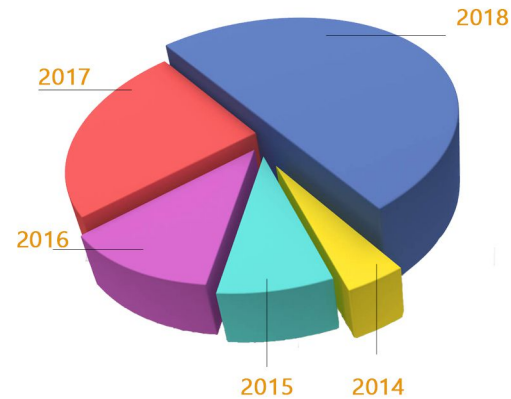

# LED Standing Display PostAir



Wheel





Side support




## Perimeters

		P2.5	P3
LAMP	LED type	SMD 2121	SMD 2121
MODULE	Pixel Pitch	2.5mm	2.5mm
	LED Module	320mm x 160mm	192mm x 192mm
	Resolution	128 x 64	64 x 64
	Refresh Rate	1/32 s	1/32 s
CABINET	LED Module Quantity	2 x 12 modules	3 x 10 modules
	Display Area	1.2 m <sup>2</sup>	1.1 m <sup>2</sup>
	Display Size	640mm x 1920mm	576mm x 1920mm
	Cabinet Size	660mm x 1940mm	696mm x 1940mm
	Resolution	256 x 768	192 x 640
	Net Weight	40Kg	40Kg
	Ingress Protection	Front IP43/ Back IP43	Front IP43/ Back IP43
	Power	AC 240/100 -+10%	AC 240/100 -+10%
	Serviceability	Front Maintenance	Front Maintenance
DISPLAY	Max Power Consumption	600 W	600 W
	Avg Power Consumption	200 W	200 W
	Viewing Angle (H/V)	160° / 160°	160° / 160°
	Brightness	1000~1100 cd/m <sup>2</sup>	1000~1100 cd/m <sup>2</sup>
	Pixel Density (Pixel/m <sup>2</sup> )	160000	111111
	Contrast Ratio	4000:1	4000:1
	Temperature/Humidity	-10° to +60° C, 10% to 90%	-10° to +60° C, 10% to 90%
	Lifetime (50% Brightness)	80,000 Hours	80,000 Hours
	Processing	16bit	16bit
	Colors	281 Trillion	281 Trillion
	Refresh Rate	3840 Hz	3840 Hz
	Brightness Level	Auto/ Manual/ Programmable	Auto/ Manual/ Programmable






# LED Standing Display PostAir



Wheel





Side support



## Perimeters

		P1.875	P2.5 PRO
LAMP	LED type	SMD 1515	SMD 2121
MODULE	Pixel Pitch	1.86mm	2.5mm
	LED Module	320mm x 160mm	280mm x 210mm
	Resolution	172 x 86	112 x 84
	Refresh Rate	1/43 s	1/32 s
CABINET	LED Module Quantity	2 x 12 modules	32x 9 modules
	Display Area	1 m <sup>2</sup>	1.1 m <sup>2</sup>
	Display Size	640mm x 1920mm	560mm x 1890mm
	Cabinet Size	660mm x 1940mm	570mm x 1920mm
	Resolution	344 x 1032	228 x 768
	Net Weight	40Kg	40Kg
	Ingress Protection	Front IP43/ Back IP43	Front IP43/ Back IP43
	Power	AC 240/100 -+10%	AC 240/100 -+10%
	Serviceability	Front Maintenance	Front Maintenance
DISPLAY	Max Power Consumption	600 W	600 W
	Avg Power Consumption	200 W	200 W
	Viewing Angle (H/V)	160° / 160°	160° / 160°
	Brightness	1000~1100 cd/m <sup>2</sup>	1000~1100 cd/m <sup>2</sup>
	Pixel Density (Pixel/m <sup>2</sup> )	160000	111111
	Contrast Ratio	4000:1	4000:1
	Temperature/Humidity	-10° to +60° C, 10% to 90%	-10° to +60° C, 10% to 90%
	Lifetime (50% Brightness)	80,000 Hours	80,000 Hours
	Processing	16bit	16bit
	Colors	281 Trillion	281 Trillion
	Refresh Rate	3840 Hz	3840 Hz
	Brightness Level	Auto/ Manual/ Programmable	Auto/ Manual/ Programmable



## LED Standing Display PostAir Styles



## Showcase



Hanging



iPhone-Standing



Wall Mount

### Three styles to show your saying's

Hanging Style - Having two steel rods that help to attach to ceiling.

Standing Style - Having steel floor plate to support the display screen.

Wall Mount - Having an steel plate to wall to support the screen hang.

