


# novara

## **Precision Digital Textile Coating**

The Novara digital textile coating technology delivers high precision application of functional coatings for technical textiles. Combining the throughput of conventional coating technologies, with the precision of digital, Novara enables new product innovation and significant cost reductions. By only delivering coating where it is needed, with precision 2D patterning and registered two-sided coating, Novara is a breakthrough manufacturing technology for the next generation of high value, low cost technical textile applications.

#### **Benefits:**

- 1. New product innovation
- 2. Precision digital placement of coatings2D PatterningTwo-sided application
- 3. More profitable production:
  Reduced materials
  Reduced inventory
  Less energy
  Lowered labour costs
- 4. Digital productivity
  Rapid changeovers
  Short runs at low cost
  Reduced waste

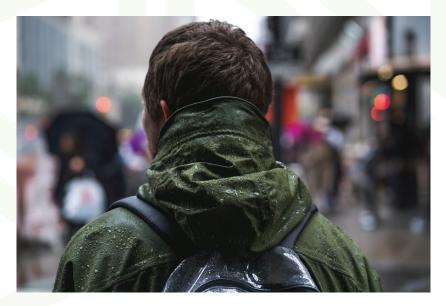




## Novara – an Integrated Precision Digital Textile Coating Solution

The Novara system is an integrated textile coating module that can be delivered as a stand-alone machine or as a module that can be retrofitted to an existing textile line. It includes an integrated infra-red dryer for water-based coatings that operates in-line with the digital coating module to deliver an ultra-compact solution. The system has an automated fluid supply that delivers fast fluid changeovers in less than five minutes.

#### Novara Precision Digital Coater 1.8 m wide

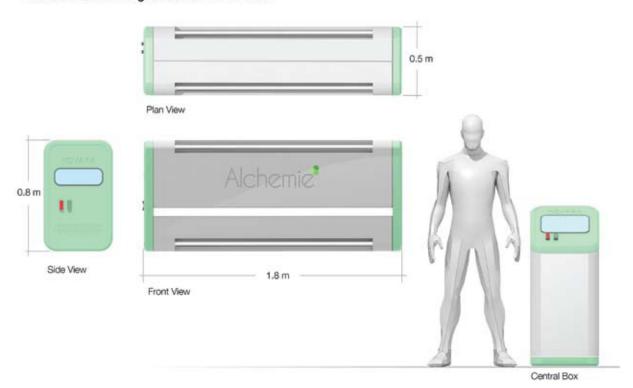

### **Technical specification:**

Throughput	~2 litres per minute at 1.8 m wide (~50 gsm wet add-on)
Coating fluids	Up to 200 cPoise
2D pattern resolution	500 microns / ~50 dots per inch
Sided application	Single or duplex application
Drying	IR inline (optional)
Web width	0.6, 1.8 and 3.6 m
Coatings demonstrated	Hydrophobic, stain resistant, fire retardant, conductive, anti-microbial, medical device microencapsulated, nanoparticles,
Substrates	Polyester, Nylon, Cotton, Wool, Blends
Substrate basis weight	50 – 1000 gsm
Changeover time	< 5 mins, automated



